
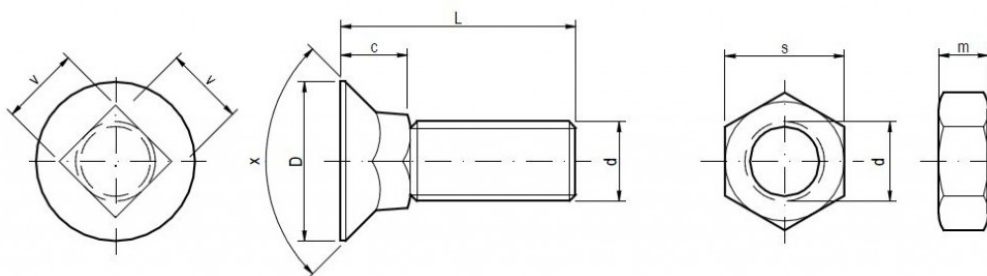


UNI 6104 (8.8, 10.9)

Pluhové šrouby se čtyřhranem a s maticí DIN 934 (8.8)

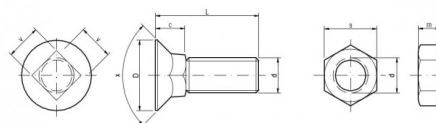

Specifikace

d	c	D	x	v	s	m
M 12	12,00	24,00	90° + 5°	12,00	19,00	10,00
M 14	14,00	28,00	90° + 5°	14,00	22,00	11,00

Balení

	Balení bez matic	Balení s maticemi
	bez matic	s maticemi
UNI 6104 (8.8, 10.9)	100	50/50
UNI 6104 (8.8, 10.9)	150	100/100
UNI 6104 (8.8, 10.9)	100	100/100
UNI 6104 (8.8, 10.9)	90	50/50
UNI 6104 (8.8, 10.9)	80	50/50
UNI 6104 (8.8, 10.9)	60	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50
UNI 6104 (8.8, 10.9)	50	50/50