


DIN 11014 (8.8, 10.9)


Plough bolts with 2 nibs, with nuts DIN 934 (8.8)

THE MOST PARTICULAR USE

The bolts to machinery of VOGEL & NOOT

The most often used bolt 12 x 35



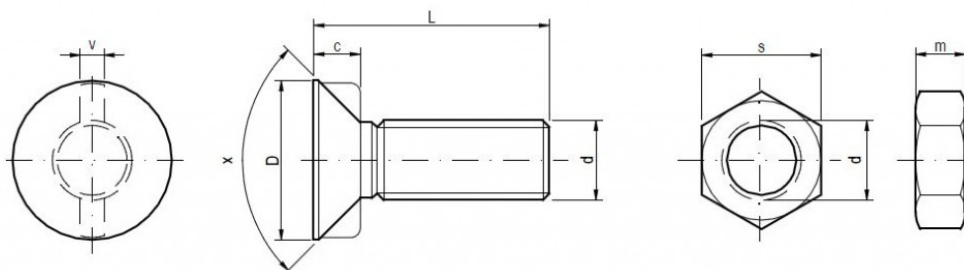

Specifications

d	c	D	x	v	s	m
M 10	5,50	19,00	90°	3,20	17,00	8,00
M 12	7,50	24,00	90°	3,60	19,00	10,00
M 14	9,50	28,00	90°	4,00	22,00	11,00

The bolts DIN 11014 do fit to machinery of OEM VOGEL & NOOT, AMAZONE and many others.

Packaging

Packed in boxes / pcs		Packaging without nuts	Packaging with nuts
10 x 25	DIN 11014 (8.8, 10.9)	200	150/150
10 x 30	DIN 11014 (8.8, 10.9)	150	100/100
10 x 35	DIN 11014 (8.8, 10.9)	150	100/100
10 x 40	DIN 11014 (8.8, 10.9)	100	100/100
10 x 45	DIN 11014 (8.8, 10.9)	100	50/50
10 x 50	DIN 11014 (8.8, 10.9)	100	50/50
10 x 55	DIN 11014 (8.8, 10.9)	100	50/50
10 x 60	DIN 11014 (8.8, 10.9)	150	100/100
10 x 70	DIN 11014 (8.8, 10.9)	150	100/100
10 x 80	DIN 11014 (8.8, 10.9)	100	50/50
10 x 90	DIN 11014 (8.8, 10.9)	80	50/50
10 x 100	DIN 11014 (8.8, 10.9)	80	50/50

12 x 30	DIN 11014 (8.8, 10.9)	100	50/50
12 x 35	DIN 11014 (8.8, 10.9)	100	50/50
12 x 40	DIN 11014 (8.8, 10.9)	150	100/100
12 x 45	DIN 11014 (8.8, 10.9)	150	100/100
12 x 50	DIN 11014 (8.8, 10.9)	100	100/100
12 x 55	DIN 11014 (8.8, 10.9)	100	50/50
12 x 60	DIN 11014 (8.8, 10.9)	90	50/50
12 x 65	DIN 11014 (8.8, 10.9)	90	50/50
12 x 70	DIN 11014 (8.8, 10.9)	80	50/50
12 x 75	DIN 11014 (8.8, 10.9)	80	50/50
12 x 80	DIN 11014 (8.8, 10.9)	60	50/50
12 x 85	DIN 11014 (8.8, 10.9)	60	50/50
12 x 90	DIN 11014 (8.8, 10.9)	50	50/50
12 x 100	DIN 11014 (8.8, 10.9)	50	50/50
14 x 35	DIN 11014 (8.8, 10.9)	50	50/50
14 x 40	DIN 11014 (8.8, 10.9)	50	50/50
14 x 45	DIN 11014 (8.8, 10.9)	50	50/50
14 x 50	DIN 11014 (8.8, 10.9)	50	50/50
14 x 60	DIN 11014 (8.8, 10.9)	50	50/50
14 x 70	DIN 11014 (8.8, 10.9)	50	50/50
14 x 80	DIN 11014 (8.8, 10.9)	50	50/50
14 x 90	DIN 11014 (8.8, 10.9)	50	50/50