



DIN 605 (4.8, 8.8, 10.9)

ČSN 02 1327 (4.8, 8.8, 10.9) The countersunk square bolts with long square

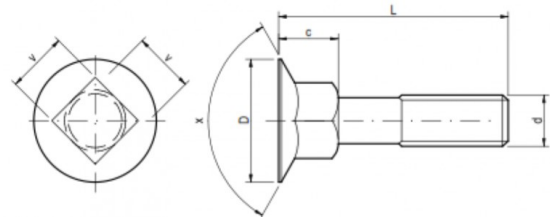

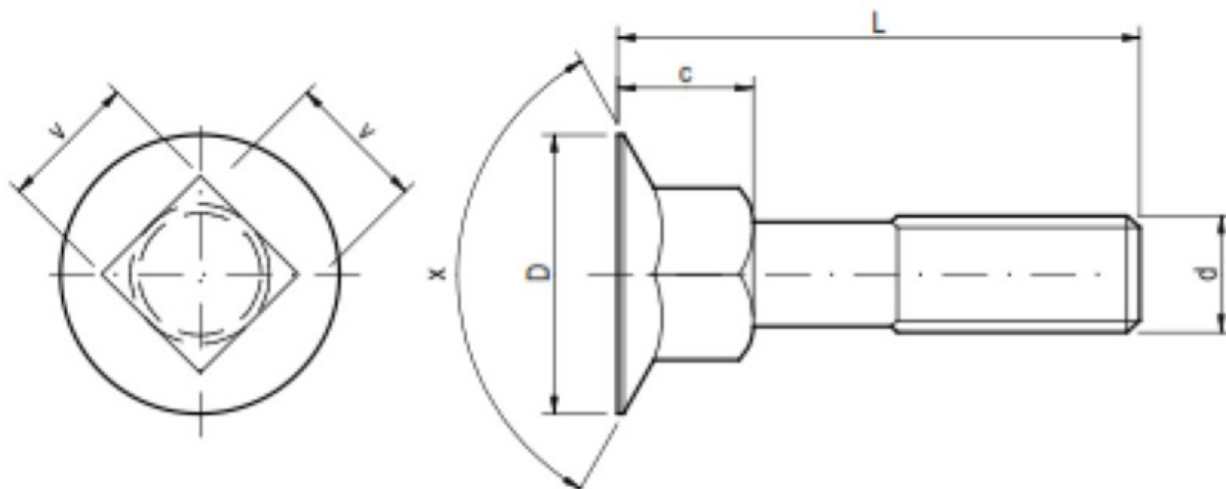

Specifications

| d | c | D | x | v |
|------|-------|-------|------|-------|
| M 6 | 7,00 | 16,00 | 120° | 6,00 |
| M 8 | 9,00 | 20,00 | 120° | 8,00 |
| M 10 | 11,00 | 24,00 | 120° | 10,00 |
| M 12 | 14,00 | 28,00 | 120° | 12,00 |

Packaging

| Packed in boxes/pcs | | Packaging/pcs |
|---------------------|--------------------------|---------------|
| 6 x 30 | DIN 605 (4.8, 8.8, 10.9) | 300 |
| 6 x 35 | DIN 605 (4.8, 8.8, 10.9) | 300 |
| 6 x 40 | DIN 605 (4.8, 8.8, 10.9) | 250 |
| 6 x 45 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 6 x 50 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 6 x 55 | DIN 605 (4.8, 8.8, 10.9) | 300 |
| 6 x 60 | DIN 605 (4.8, 8.8, 10.9) | 300 |
| | | |
| 8 x 30 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 8 x 35 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 8 x 40 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 8 x 45 | DIN 605 (4.8, 8.8, 10.9) | 250 |
| 8 x 50 | DIN 605 (4.8, 8.8, 10.9) | 250 |
| 8 x 55 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 8 x 60 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 8 x 65 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 8 x 70 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 8 x 75 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 8 x 80 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| | | |
| 10 x 40 | DIN 605 (4.8, 8.8, 10.9) | 200 |
| 10 x 45 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 10 x 50 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 10 x 55 | DIN 605 (4.8, 8.8, 10.9) | 150 |
| 10 x 60 | DIN 605 (4.8, 8.8, 10.9) | 100 |
| 10 x 65 | DIN 605 (4.8, 8.8, 10.9) | 100 |
| 10 x 70 | DIN 605 (4.8, 8.8, 10.9) | 100 |
| 10 x 75 | DIN 605 (4.8, 8.8, 10.9) | 100 |
| 10 x 80 | DIN 605 (4.8, 8.8, 10.9) | 100 |

| | | |
|----------|--------------------------|-----|
| 10 x 90 | DIN 605 (4.8, 8.8, 10.9) | 80 |
| 10 x 100 | DIN 605 (4.8, 8.8, 10.9) | 60 |
| | | |
| 12 x 50 | DIN 605 (4.8, 8.8, 10.9) | 100 |
| 12 x 55 | DIN 605 (4.8, 8.8, 10.9) | 80 |
| 12 x 60 | DIN 605 (4.8, 8.8, 10.9) | 80 |
| 12 x 65 | DIN 605 (4.8, 8.8, 10.9) | 80 |
| 12 x 70 | DIN 605 (4.8, 8.8, 10.9) | 60 |
| 12 x 75 | DIN 605 (4.8, 8.8, 10.9) | 60 |
| 12 x 80 | DIN 605 (4.8, 8.8, 10.9) | 60 |
| 12 x 90 | DIN 605 (4.8, 8.8, 10.9) | 50 |
| 12 x 100 | DIN 605 (4.8, 8.8, 10.9) | 50 |