


## **MP - 2 G (12.9)**


### **Plough bolts with conical head with nuts DIN 934 (10.9)**

#### **THE MOST PARTICULAR USE**

The bolts to machinery of KVERNELAND

The most often used bolt - 12 x 36



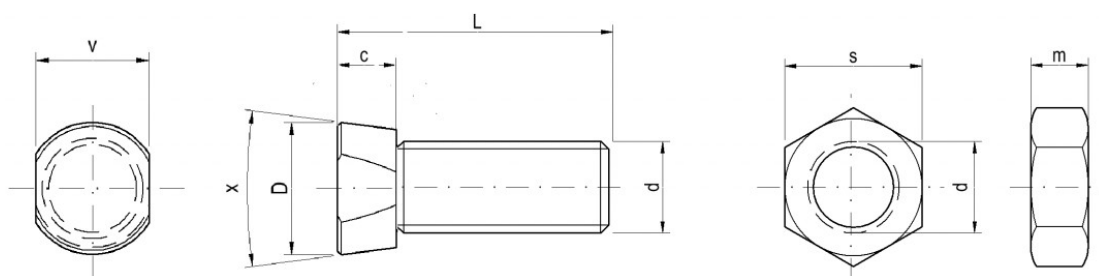

## Specifications

d	c	D	x	v	s	m
M 12	8,00	16,00	20°	13,40	19,00	10,00

The bolts MP - 2 G do fit to machinery of OEM KVERNELAND, ÖVERUM, PÖTTINGER LANDSBERG, LEMKEN, NIEMEYER, RABE, OVLAC, KÖCKERLING, FARMET, BEDNAR, ROSS, PHX, UNIA GRUDZIADZ, OPALL AGRI and many others.

## Packaging

Packed in boxes / pcs		Packing without nuts	Packing with nuts
12 x 36	MP - 2 G 12.9	100	50/50