


MP - 4 (8.8, 10.9, 12.9)


Cultivator bolts with conical head and with square neck with nuts DIN 934 (8.8, 10.9)

THE MOST PARTICULAR USE

The bolts to cultivator machinery

The most often used bolt - 10 x 35, 10 x 40, 10 x 60



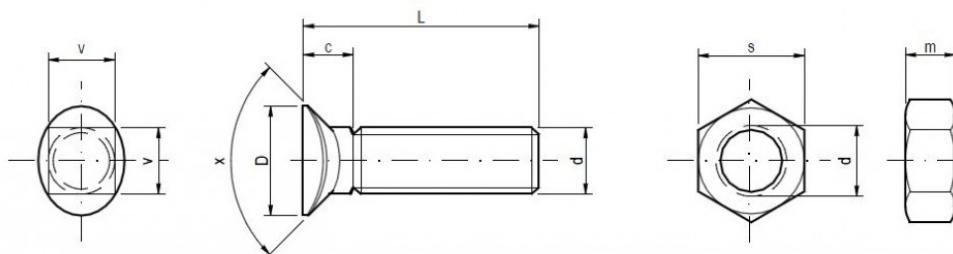

Specifications

d	c	D	x	v	s	m
M 10	8,00	16,5/15,5	90°	10,00	17,00	8,00
M 12	9,50	22/19,5	90°	12,00	19,00	10,00

The bolts MP - 4 do fit to machinery of OEM LEMKEN, ÖVERUM, PÖTTINGER, LANDSBERG, KVERNELAND, NIEMEYER, RABE, OVLAC, KÖCKERLING, FARMET, BEDNAR, ROSS, PHX, UNIA GRUDZIADZ, OPALL AGRI, KONGSKILDE and many others.

Packaging

Packed in boxes / pcs		Packaging without nuts	Packaging with nuts
10 x 30	MP - 4 8.8,10.9,12.9	150	100/100
10 x 35	MP - 4 8.8,10.9,12.9	150	100/100
10 x 37	MP - 4 8.8,10.9,12.9	100	100/100
10 x 40	MP - 4 8.8,10.9,12.9	100	100/100
10 x 42	MP - 4 8.8,10.9,12.9	100	100/100
10 x 44	MP - 4 8.8,10.9,12.9	100	50/50
10 x 45	MP - 4 8.8,10.9,12.9	100	50/50
10 x 50	MP - 4 8.8,10.9,12.9	100	50/50
10 x 55	MP - 4 8.8,10.9,12.9	100	50/50
10 x 60	MP - 4 8.8,10.9,12.9	150	100/100
10 x 70	MP - 4 8.8,10.9,12.9	150	100/100

10 x 80	MP - 4 8.8,10.9,12.9	100	50/50
10 x 90	MP - 4 8.8,10.9,12.9	80	50/50
10 x 100	MP - 4 8.8,10.9,12.9	80	50/50
12 x 35	MP - 4 8.8,10.9,12.9	100	50/50
12 x 37	MP - 4 8.8,10.9,12.9	100	50/50
12 x 40	MP - 4 8.8,10.9,12.9	150	100/100
12 x 45	MP - 4 8.8,10.9,12.9	150	100/100
12 x 48	MP - 4 8.8,10.9,12.9	150	100/100
12 x 50	MP - 4 8.8,10.9,12.9	100	100/100
12 x 55	MP - 4 8.8,10.9,12.9	100	50/50
12 x 60	MP - 4 8.8,10.9,12.9	90	50/50
12 x 70	MP - 4 8.8,10.9,12.9	80	50/50
12 x 80	MP - 4 8.8,10.9,12.9	60	50/50
12 x 90	MP - 4 8.8,10.9,12.9	50	50/50
12 x 100	MP - 4 8.8,10.9,12.9	50	50/50