



## **MP - 5 (10.9, 12.9)**


**Plough bolts with conical head, with nuts DIN 934 (8.8, 10.9)**

### **THE MOST PARTICULAR USE**

The bolts to machinery of PÖTTINGER

The most often used bolt - 14 x 36, 14 x 38

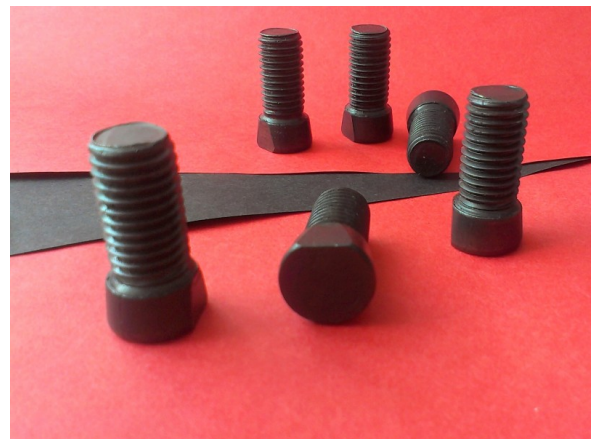

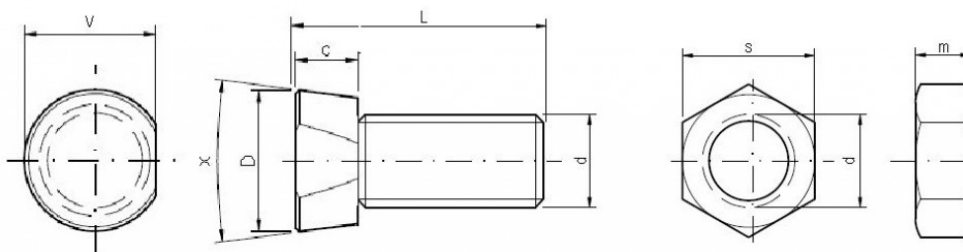

## Specifications

d	c	D	x	v	s	m
M14	9,70	18,50	15°	16,80	22,00	11,00

The bolts MP - 5 do fit to machinery of PÖTTINGER

## Packaging

Packed in boxes		Packing without nuts	Packing with nuts
14 x 36	MP - 5 (10.9)	100	50/50
14 x 38	MP - 5 (10.9)	100	50/50
14 x 36	MP - 5 (12.9)	100	50/50
14 x 38	MP - 5 (12.9)	100	50/50