


## MP - T (8.8, 10.9)


### Plough bolts with square conical head with nuts DIN 934 (8.8, 10.9)

#### THE MOST PARTICULAR USE

The bolts to machinery of ÜNLÜ

The most often used bolt - 12 x 40

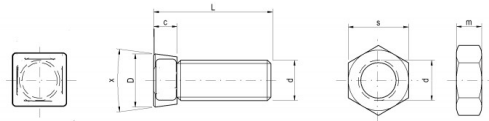

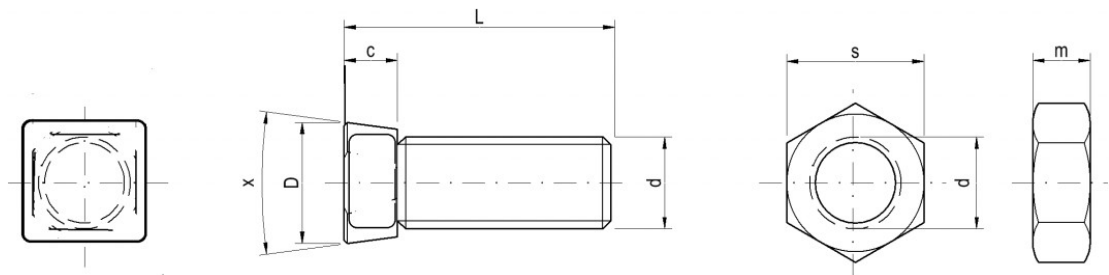

## Specifications

d	c	D	x	s	m
M 12	6,50	15,00 x 15,00	30°	19,00	10,00

The bolts MP - T do fit to machinery of OEM ÜNLÜ

## Packaging

Packed in boxes / pcs		Packaging without nuts	Packaging with nuts
12 x 30	MP - T (8.8, 10.9)	150	100/100
12 x 32	MP - T (8.8, 10.9)	150	100/100
12 x 35	MP - T (8.8, 10.9)	150	100/100
12 x 38	MP - T (8.8, 10.9)	100	50/50
12 x 40	MP - T (8.8, 10.9)	100	50/50
12 x 45	MP - T (8.8, 10.9)	100	50/50
12 x 50	MP - T (8.8, 10.9)	100	50/50